

FTBx-740C-DWC TUNABLE OTDR

C-BAND DWDM METRO ETHERNET LINK CHARACTERIZATION



NEW OTDR
GENERATION

Tunable DWDM OTDR for testing through MUX/DEMUX channels to provide complete end-to-end link characterization and troubleshooting of Metro Ethernet links and commercial services.

SPEC SHEET

KEY FEATURES

- C-BAND ITU grid channel selection to test through DWDM MUX/DEMUX
- In-service testing of active networks
- High-resolution and short dead zones
- Select favorite or imported channels list
- Supports combined DWDM and CWDM modules with FTB-2 platform

APPLICATIONS

- Single-ended construction and troubleshooting solution
- DWDM Metro Ethernet links
- Commercial services deployments
- Fiber deep and node splitting
- CBH Antenna feeds

COMPLEMENTARY PRODUCTS



Platform
FTB-2/FTB-2 Pro



Fiber Inspection Probe
FIP-400B (Wi-Fi or USB)



CWDM OTDR Module
FTB-7400E-CWx



LOADED WITH FEATURES TO BOOST YOUR EFFICIENCY

**Real-Time Averaging**

Activates the OTDR laser in continuous shooting mode, the trace refreshes in real time and allows to monitor the fiber for a sudden change. Perfect for a quick overview of the fiber under test.

**Automode**

Used as a discovery mode, this feature automatically adjusts the distance range and the pulse width in function of the link under test. It is recommended to adjust the parameters to perform additional measurements to locate other events.

**Zoom Tools**

Zoom and center to facilitate the analysis of your fibers. Draw a window around the area of interest and center in the screen quicker.

**Set Parameters On The Fly**

Dynamically change OTDR settings for the ongoing acquisition without stopping or returning to submenus.


LOOKING FOR ICON-BASED MAPPING?

Linear View (Included on All EXFO OTDRs)

Available on our OTDRs since 2006, the linear view simplifies the reading of an OTDR trace by displaying icons in a linear way for each wavelength. This view converts the graph data points obtained from a traditional single pulse trace into reflective or non-reflective icons. With applied pass/fail thresholds, it becomes easier to pinpoint faults on your link.

This improved version of linear view provides the flexibility to display both the OTDR graph and its linear view without having to toggle to analyze your fiber link.

Although this linear view simplifies the OTDR reading of a single pulse width's trace, the user will still need to set the OTDR parameters. In addition, multiple traces must often be performed in order to fully characterize the fiber links. See the section below to learn how the iOLM can perform this automatically and with more accurate results.

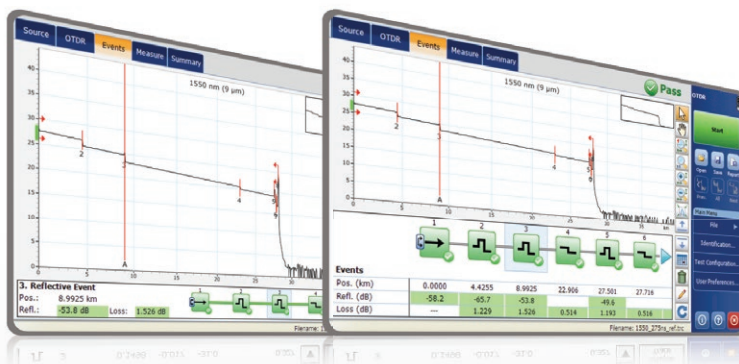

FIBER CONNECTOR INSPECTION AND CERTIFICATION—THE ESSENTIAL FIRST STEP BEFORE ANY OTDR TESTING



Connect^{or}Max2

Taking the time to properly inspect a fiber-optic connector using an EXFO fiber inspection probe can prevent a host of issues from arising further down the line, thus saving you time, money and trouble. Moreover, using a fully automated solution with autofocus capabilities will turn this critical inspection phase into a fast and hassle-free one-step process.

DID YOU KNOW THAT THE CONNECTOR OF YOUR OTDR/iOLM IS ALSO CRITICAL?

The presence of a dirty connector at an OTDR port or launch cable can negatively impact your test results, and even cause permanent damage during mating. Therefore, it is critical to regularly inspect these connectors to ensure that they are free of any contamination. Making inspection the first step of your OTDR best practices will maximize the performances of your OTDR and your efficiency.

FIVE MODELS TO FIT YOUR BUDGET

FEATURES	USB WIRED			WIRELESS	
	Basic FIP-410B	Semi-Automated FIP-420B	Fully Automated FIP-430B	Semi-Automated FIP-425B	Fully Automated FIP-435B
Three magnification levels	✓	✓	✓	✓	✓
Image capture	✓	✓	✓	✓	✓
Five-megapixel CMOS capturing device	✓	✓	✓	✓	✓
Automatic fiber image-centering function	✗	✓	✓	✓	✓
Automatic focus adjustment	✗	✗	✓	✗	✓
Onboard pass/fail analysis	✗	✓	✓	✓	✓
Pass/fail LED indicator	✗	✓	✓	✓	✓
Wi-Fi connectivity	✗	✗	✗	✓	✓

For additional information, please refer to the FIP-400B USB or FIP-400B wireless specification sheets.

AVAILABLE IN THE FTB-2/FTB-2 PRO PLATFORM

The FTB-2, available in a standard or Pro model, is the most compact solution on the market for **multirate, multitechnology, multiservice testing**, delivering all the power of a high-end platform in a conveniently sized, go-anywhere field-testing tool.



**INTUITIVE
INTERFACE**

Widescreen display and
single touch gesture support



**UNMATCHED
CONNECTIVITY**

Wi-Fi, Bluetooth, Gigabit Ethernet and
multiple USB ports



**INCREASED
PRODUCTIVITY**

Store, push and share test data
automatically

DO MORE BY GOING FTB PRO

The Windows 8.1 Pro operating system allows for a wide choice of third-party applications and supports an extensive range of USB devices.

- › Start faster and multitask
- › Use any office suite
- › Connect to printers, cameras, keyboards, mice, and more

Bring Your Own Apps



Share your desktop (e.g., using TeamViewer)



Antivirus software



Communicate via e-mail services and
over-the-top (OTT) apps



Record and automate actions



Share files via cloud-based storage

Go FTB Pro!



All specifications valid at 23 °C ± 2 °C with an FC/APC connector, unless otherwise specified.

TECHNICAL SPECIFICATIONS

Wavelength (nm) / ITU channel range	C-Band tunable 1528.77-1563.86 nm ITU Channels 17-61 (191.7 THz - 196.1 THz)
Channel spacing tuning	50 GHz increments from nominal ITU 100 GHz grid
Dynamic range at 20 µs (dB) ^a	40
Event dead zone (m) ^b	0.7
Attenuation dead zone (m) ^b	3.5
Distance range (km)	0.1 to 400
Pulse widths (ns)	5 to 20 000
Sampling points	Up to 256 000
Sampling resolution (m)	0.04 to 10
Distance accuracy (m) ^c	±(0.75 + 0.0025 % x distance + resolution)

For complete details on all available configurations, refer to the Ordering Information section.

Notes

- a. Typical dynamic range with a three-minute averaging at SNR = 1.
b. Typical dead zone of singlemode modules for reflectance at -45 dB, using a 5-ns pulse.
c. Does not include uncertainty due to fiber index.


GENERAL SPECIFICATIONS

Size (H x W x D)		158 mm x 24 mm x 174 mm (6 1/4 in x 15/16 in x 5 13/16 in)
Weight		0.4 kg (0.9 lb)
Temperature	Operating Storage	0 °C to 50 °C (32 °F to 122 °F) -40 °C to 70 °C (-40 °F to 158 °F)
Relative humidity		0 % to 85 % non-condensing



This picture is shown as a guideline only. Actual module may differ depending on the configuration selected.

LASER SAFETY

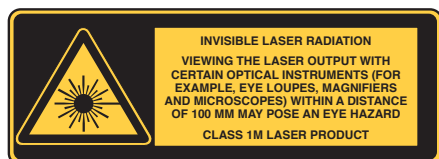

ORDERING INFORMATION

FTBx-740C-DWC-OTDR-XX

Model

FTBx-740C-DWC = DWDM Tunable SM OTDR
C-Band 1528-1563 nm, 100/50 GHz, 40 dB (9/125 µm)

Example: FTBx-740C-DWC-OTDR-EA-EUI-91

Singlemode Connector

EA-EUI-28 = APC/DIN 47256
EA-EUI-89 = APC/FC narrow key
EA-EUI-91 = APC/SC
EA-EUI-95 = APC/E-2000
EA-EUI-98 = APC/LC

EI CONNECTORS



To maximize the performance of your OTDR, EXFO recommends using APC connectors on singlemode port. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly dead zones. APC connectors provide better performances than UPC connectors, thereby improving testing efficiency.

Note: UPC connectors are not available.



EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.